


BREATHER - FSBA / TBA



- ALUMINIUM DIE CAST CONSTRUCTION - VENTS UNDERNEATH
- FILTRATION 40 MICRONS STANDARD / OPTIONAL 10 & 3 MICRONS
- AIR FLOWS TO 25 CFM (750 LPM)
- RUGGED CAST ALUMINIUM HOUSING (FOR BM MODEL - OPTIONAL)
- METAL STRAINER - 4 " STANDARD (OPTIONAL 6" & 8")
- HARDWARE INCLUDES GASKETS & (10-32) SCREWS

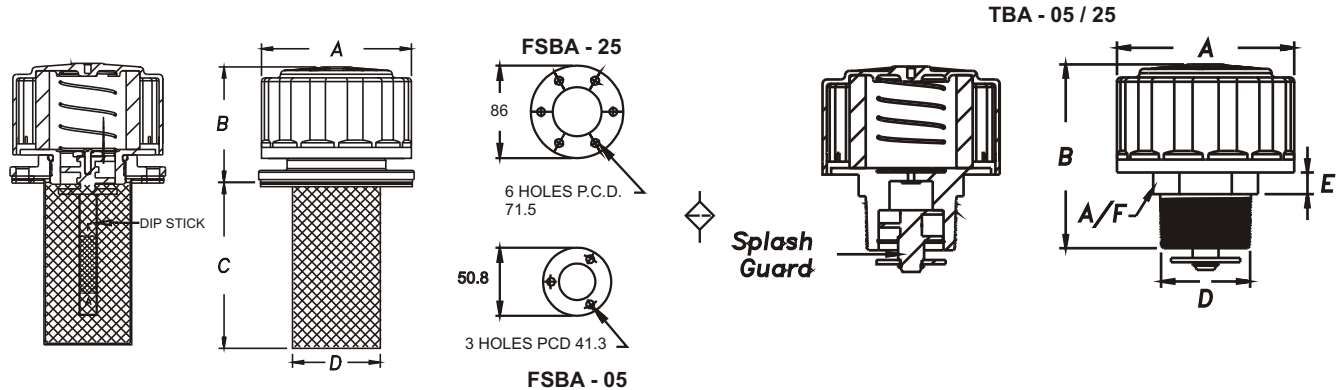

MODEL	DISPLACEMENT	RATING	A	B	C *	D	E	A/F	WT
		MICRONS							KGS
FSBA - 05	150 LPM	40	56	49	65	28			0.17
FSBA - 05 - 10	90 LPM	10							
FSBA - 25	720 LPM	40	81	65	94	48			0..39
FSBA - 25 - 10	400 LPM	10							
TBA - 05	150 LPM	40	56	66		1/2" NPT	8	25.4	0.12
TBA - 05 - 10	90 LPM	10							
TBA - 25	720 LPM	40	81	86		1-1/4" NPT	10	42.0	0.28
TBA - 25 - 10	400 LPM	10							

MODEL CODE : ASSEMBLY

FSB A	- 25	- * *	- ***	- **	- **	- **
SERIES	CAPACITY	FILTRATION	THREAD	STRAINER	FEATURE 1	FEATURE 2
	CFM	μ MICRONS		C * OPTIONAL(1)	OPTIONAL 2 (OMIT IF NOT REQD)	OPTIONAL # (OMIT IF NOT REQD)
FSBA	05 (150 LPM)	40 - 40 μ Std		STD	SG - SPLASH GUARD DS - DIP STICK	
FSBA	25 (750 LPM)	10 - 10 μ Nom		L 4 - STD L 6 - 152 m m L 8 - 203 m m	SG - SPLASH GUARD	
TBA	05 (150 LPM)	03 - 3 μ Nom	04 B - 1/2" BSPP 04 N - 1/2" NPT 08 S - 3/4" UNF-16		DS 4 - DIP STICK 4" DS 6 - DIP STICK 6"	P5 - Pressurised 5psi
TBA	25 (750 LPM)		10 B - 1-1/4" BSPP 10 N - 1-1/4" NPT 20 S - 1-5/8" UNF-12		DS 8 - DIP STICK 8"	

CONSULT FACTORY - FOR OPTIONAL THREAD SIZE TBA-05 - 3/8 " / TBA-25 - 3/4 " & 1 "