



SUCTION STRAINER - S C 2



- REUSABLE STAINLESS STEEL 100 MESH STANDARD
- STURDY ALL METAL STEEL CONSTRUCTION
- FILTRATION 149 MICRONS
- CONTINUOUS EPOXY BOND
- MAX. WORKING TEMP. 80° C.
- SUITABLE FOR HYDRAULIC / MINERAL OIL
- FLEXIBLE MAGNETIC WRAP AVAILABLE

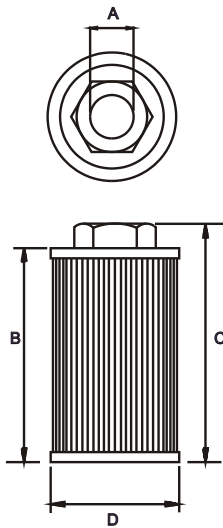

MODEL NO	FLOW LPM	THREAD SIZE A	CODE	HT B	TOTAL HT C	CAP DIA D	SCREEN AREA (SQ. CMS)	WT KGS	MAGNET WRAP
SC 2 - 0 0 3	12	3/8	03	50	62	42	220	0 . 1 6	1
SC 2 - 0 0 5	20	1/2	04	64	78	66	400	0 . 2 4	1
SC 2 - 0 0 7	30	3 / 4	06	75	89	66	438	0 . 2 8	2
SC 2 - 0 1 0	40	1	08	122	137	66	710	0 . 3 3	2
SC 2 - 0 2 0	80	1 - 1 / 4	10	160	175	85	1045	0 . 4 5	2
SC 2 - 0 3 0	120	1 - 1 / 2	12	190	205	85	1450	0 . 5 0	2
SC 2 - 0 5 0	200	1 - 1 / 2	12	240	254	100	2195	0 . 6 0	2
SC 2 - 0 5 1	200	2	16	240	254	100	2195	0 . 7 0	2
SC 2 - 0 7 5	300	2 - 1 / 2	20	240	255	130	2580	0 . 9 5	3
SC 2 - 1 0 0	400	3	24	285	300	130	3225	1 . 1 5	3
SC 2 - 1 5 0	600	3	24	325	340	130	4650	1 . 6 0	3
*SC 2 - 2 0 0	800	4	32	220	295	200	6225	4 . 2 0	4
*SC 2 - 3 0 0	1200	4	32	306	381	200	8840	4 . 5 0	4
*SC 2 - 4 0 0	1600	4	32	387	462	200	11225	4 . 8 0	4
*SC 2 - 6 0 0	2400	4	32	540	615	200	15675	5 . 4 0	4

* AVAILABLE WITH NPT THREADS ONLY

MODEL CODE : ASSEMBLY

SC 2	- 0 1 0	- **	- **	- **	- **	- **
SERIES	SIZE	PORT THDS. SIZE	PORT THDS. CONNECTION	MICRONS. OPTIONAL #	FEATURE. SPECIAL 1	FEATURE. SPECIAL 2
		REFER TABLE OMIT IF STD	B-BSPP - STD N-NPT - OPTIONAL	149 - SS 100 MESH STD 125 - SS 120 MESH 100 - SS 150 MESH 074 - SS 200 MESH 063 - SS 250 MESH Also - 30 / 60 MESH	R B 3 - 3 PSI ByPass Optional	M - Magnet Wrap Optional

OMIT IF STANDARAD

CONSULT FACTORY, FOR OPTIONAL / SPECIAL FEATURE

(Dimensions / Model Nos Revised W E F Oct 08)