



SUCTION STRAINER - S C 3

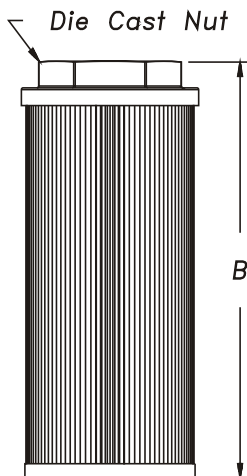

- REUSABLE SS 100 MESH / 149 MICRON STD.
- ALUMINIUM DIE CAST NUT
- STEEL CAP / SUPPORT TUBE
- CONTINUOUS EPOXY BOND
- MAX. WORKING TEMP. 80° C.
- SUITABLE FOR HYDRAULIC / MINERAL OIL
- FLEXIBLE MAGNETIC WRAP AVAILABLE



MODEL NO	FLOW LPM	THREAD SIZE A	CODE	OVERALL LENGTH B	DIA NUT CAP C	NUT A/F	SCREEN AREA (SQ. CMS)	WT KGS	MAGNET WRAP
S C 3 - 0 0 2	8	1 / 4	02	90	46	24	187	0 . 1 0	2
S C 3 - 0 0 3	12	3 / 8	03	90	46	24	187	0 . 1 0	2
S C 3 - 0 0 5	20	1 / 2	04	105	46	30	226	0 . 1 0	2
S C 3 - 0 0 7	28	3 / 4	06	109	64	35	406	0 . 2 0	2
S C 3 - 0 1 0	40	1	08	139	64	46	542	0 . 2 0	2
S C 3 - 0 1 5	60	1 - 1 / 4	10	139	86	51	929	0 . 3 0	2
S C 3 - 0 2 0	80	1 - 1 / 2	12	168	86	60	1161	0 . 3 5	2
S C 3 - 0 3 0	120	1 - 1 / 2	12	200	86	60	1393	0 . 4 0	2
S C 3 - 0 4 0	160	2	16	235	100	70	1806	0 . 5 5	2
S C 3 - 0 5 0	200	2	16	260	100	70	2032	0 . 6 0	2
S C 3 - 0 7 5	300	2 - 1 / 2	20	211	150	90	2787	0 . 8 5	3
S C 3 - 1 0 0	400	3	24	272	150	100	3677	1 . 0 0	3
S C 3 - 1 5 0	600	3	24	345	150	100	4838	1 . 2 5	3

MODEL CODE : ASSEMBLY

S C 3	- 0 1 0	- * *	- * *	- * *	- * *	- * *
SERIES	SIZE	PORT THDS. SIZE	PORT THDS. CONNECTION	MICRONS. OPTIONAL #	FEATURE. SPECIAL 1	FEATURE. SPECIAL 2
		REFER TABLE OMIT IF STD	B-BSPP - STD N-NPT - OPTIONAL	149 - SS 100 MESH STD 125 - SS 120 MESH 100 - SS 150 MESH 074 - SS 200 MESH 063 - SS 250 MESH Also - 30 / 60 MESH	R B 3 - 3 PSI ByPass Optional	M - Magnet Wrap Optional

OMIT IF STANDARAD

CONSULT FACTORY, FOR OPTIONAL / SPECIAL FEATURE

DIMENSIONS IN MM FOR REFERENCE ONLY