


SIGHT GLASS - SG S / A

- SHOCK RESISTANT
- STEEL / ALUMINIUM BODY
- OPERATING TEMP. 80 deg C
- BUNA - N SEAL / DOWTY SEAL
- FOR USE WITH MINERAL , & PETROLEUM BASED FLUIDS
- ANY CONTACT WITH ALCOHOL OR SOLVENTS MUST BE AVOIDED

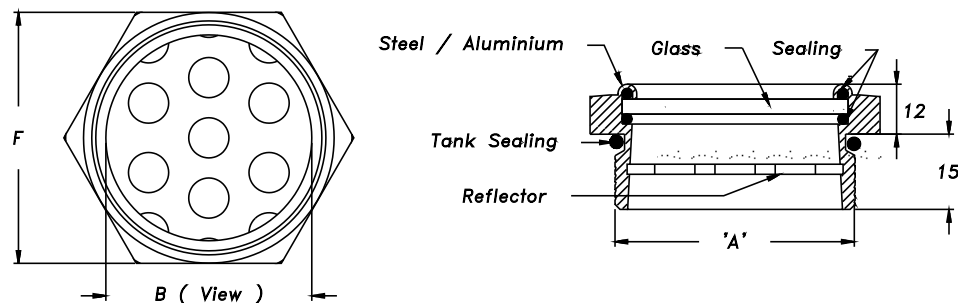

WELD FLANGE

PART NO	* A	B	F	* WELD FLANGE TO SUIT
SG* - 03B	3/8" BSPP/NPT	10	25.4	TWF.03B
SAE - 6	9/16" -18 UNF			TWF.06U
SG* - 04B	1/2" BSPP/NPT	14	25.4	TWF.04B
SAE - 8	3/4" - 16 UNF			TWF.08U
SG* - 06B	3/4" BSPP/NPT	20	32.0	TWF.06B
SAE - 12	1-1/16" - 12 UNF			TWF.12U
SG* - 08B	1" BSPP/NPT	24	38.0	TWF.08B
SAE - 16	1-5/16" - 12 UNF			TWF.16U
SG* - 10B	1-1/4" BSPP/NPT	33	50.0	TWF.10B
SAE - 20	1-5/8" - 12 UNF			TWF.20U
SG* - 12B	1-1/2" BSPP/NPT	39	55.0	TWF.12B
SAE - 24	1-7/8" - 12 UNF			TWF.24U

MODEL CODE

SG *	- 08	B	**
SERIES	SIZE	THREADS	SPECIAL FEATURE
SG A-Aluminium Body SG S-SteelBody	03B	3/8" BSPP	REFLECTOR - STD
	06U	9/16" -18 UNF	
	04B	1/2" BSPP	
	08U	3/4" -16UNF	
	06B	3/4" BSPP	
	12U	1-1/16"-12UNF	
	08B	1" BSPP	
	16U	1-5/16"-12UNF	
	10B	1-1/4" BSPP	
	20U	1-5/8" -12UNF	
	12B	1-1/2" BSPP	
	24U	1-7/8" -12UNF	

- * . REFER TO TWF DATA SHEET TO BE ORDERED SEPERATELY
- * . CONSULT FACTORY FOR METRIC THREADS

DIMENSIONS IN MM FOR REFERENCE ONLY