


TANK MOUNTED DIFFUSER - TMSUD

- TANK MOUNTED DIFFUSER
- SIDE WALL OR TANK TOP MOUNTING
- PERFORATED STEEL TUBE
- DIE CAST ALUMINIUM BUSHING WITH O Ring (SAE THREADS)
- MAX.TEMP 80° C

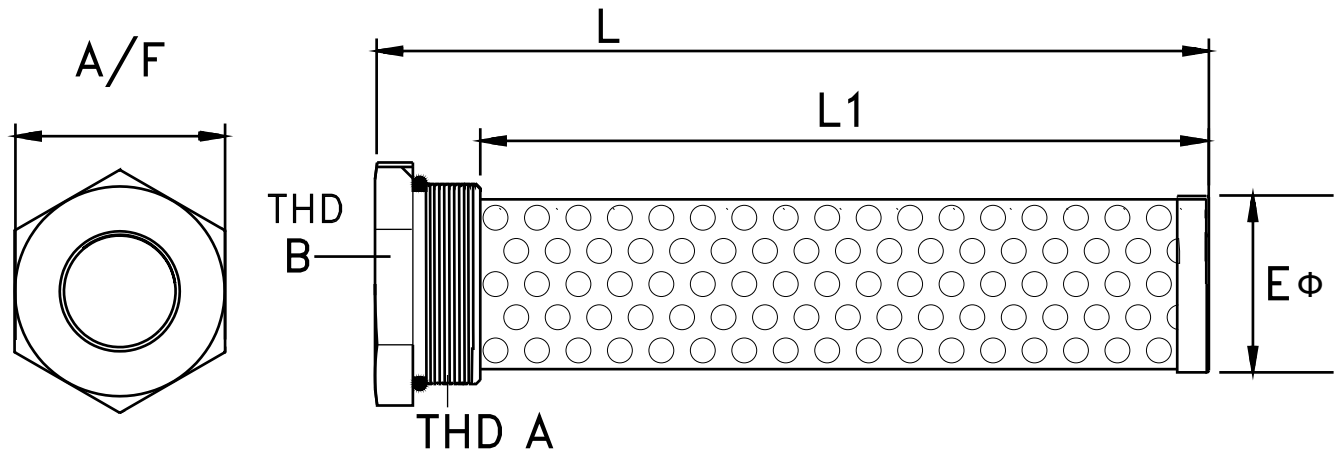

Series	Bushing Size Dim. A x Dim. B UN (2A) X UN (2B)		Flow GPM / LPM	Dimensions			WT KGS
				L	L1	E	
TMSU - 03	1 - 1/16" - 12 X	3/4" - 16		133.5	108	24.0	31.75
TMSU - 05	1 - 5/16" - 12 X	3/4" - 16		137.0	107	28.5	38.00
TMSU - 10	1 - 5/8" - 12 X	1 - 1/16" - 12		200.0	174	36.0	46.00
TMSU - 15	1 - 7/8" - 12 X	1 - 5/16" - 12		210.0	175	42.0	55.00
TMSU - 20	1 - 7/8" - 12 X	1 - 5/8" - 12		210.0	175	42.0	55.00
TMSU - 30	2 - 1/2" - 12 X	1 - 5/8" - 12		210.0	175	54.0	70.00
TMSU - 40	3 - 3/8" - 12 x	2 - 1/2" - 12		210.0	172	78.0	62.00

MODEL CODE : ASSEMBLY

TMSUD	- 10	
SERIES	7	SIZE
		SAE STD THD 'A' THD 'B'
		12S - 08S
		16S - 08S
		20S - 12S
		24S - 16S
		24S - 20S
		32S - 20S
		48S - 32S

Recommended Weld Flange

To Be Ordered
Seperately

TWF - 12 U
TWF - 16 U
TWF - 20 U
TWF - 24 U
TWF - 24 U
TWF - 32 U
TWF - 48 U

CONTACT FACTORY FOR OPTIONAL FEATURE